




Installation

Water treatment system

Stainless steel mini grease separator

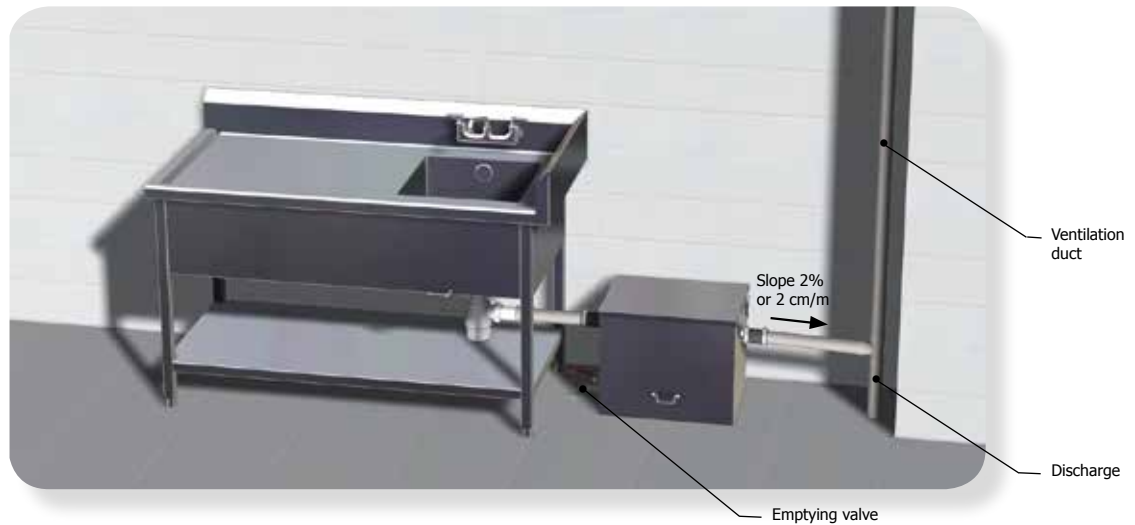

Installation instructions delivered with the system remain reference instructions.

Installation procedure :

- 1 • MINIGR is a grease separator for kitchen sink. It shall be installed out of the food preparation area..
- 2 • MINIGR is designed for the treatment of wastewater proceeding from one standard sink only.
- 3 • Install the MINIGR close to the sink, the pipework slope must equal or exceed 2 cm/m. Respect the connection nominal diameter : Dn33/42.
- 4 • The discharge pipework must be as vertical as possible (avoid losses of hydraulic loads). Connect the ventilation duct..

Maintenance procedure (when not in use):

- 1 • Clean the separator weekly : remove the cover and skim the grease layer from the water surface. Put the cover back in place.
- 2 • Clean the separator monthly:
 - Remove the cover (then connect the emptying valve using a pipe*),
 - Skim the grease layer from the water surface.,
 - Empty the MINIGR separator (in the floor drain using the emptying valve*),
 - Clean the inside of the MINIGR with warm water (turn off the emptying valve) then empty it (turn on the emptying valve),
 - Fill up the MINIGR with water to the point of overflowing, put the cover back in place (remove the pipe connected to the emptying valve).

