



Oil separators

with sludge trap & coalescing filter

- Tank in fabricated steel with lifting rings.
- Epoxy bi-component coating.
- PVC inlet and outlet.
- Vertical automatic stopper in polyethylene calibrated to 0.85.




Hydrocube range:

- Light cover (pedestrian traffic) with locking screw.
- Conical partition.
- Fully removable coalescing filter.
- Available as reinforced model (depending on installation limitations).

HydroBac range:



- Cylindrical manholes without cover.
- Removable coalescing filter.

HydroCube

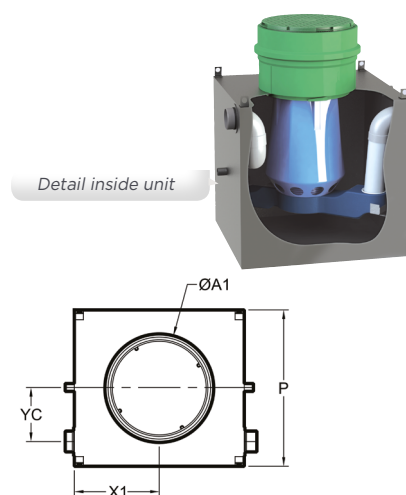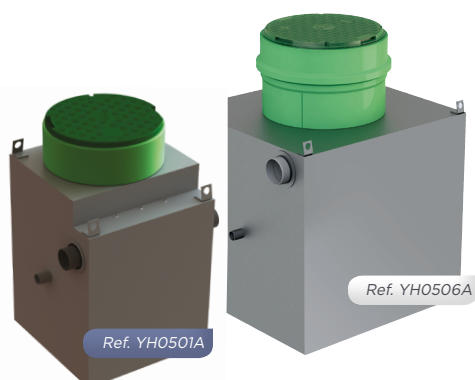

YH05A range	Size l/s	L	P	H	E	S	Fe	DN (PVC Ø)	Weight	Volume		ØA1	X1	YC	"Fixed" extension option	"Adjustable" extension option
										sludge trap	Separator					
YH0501A	1.5	900	745	1200	660	630	570	110	110	150	200	585	373	253	PLA13555G	-
YH0503A	3	1125	995	1200	790	750	450	110	151	300	442	585	498	300	PLA13556G	-
YH0506A	6	1470	1200	1740	1050	1000	740	160	247	600	960	745	650	410	-	ETR47EF ETR65EF
YH0508A	8	1525	1200	1990	1270	1220	770	160	353	800	970	745	650	410	-	
YH0510A	10	1525	1200	1990	1270	1220	770	160	360	1000	1000	745	650	410	-	

HydroBac

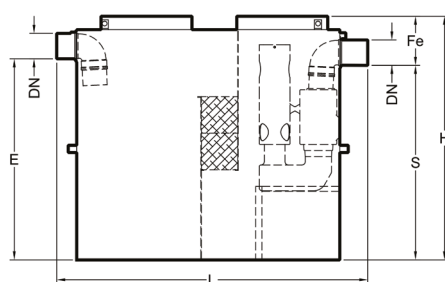

ADHFAB range	Size l/s	L	P	H	E	S	Fe	DN (PVC Ø)	Weight	Volume		ØA1	ØA2	X1	X2
										sludge trap	Separator				
ADHF115AB	15	2285	830	2000	1660	1610	390	200	561	1500	1350	750	750	575	1120
ADHF120AB	20	3220	830	2000	1550	1500	500	200	664	2000	1800	750	750	1075	1350
ADHF125AB	25	2920	1200	1920	1470	1420	500	200	805	2500	2270	750	750	430	1770
ADHF130AB	30	3520	1200	1920	1470	1420	500	200	938	3000	2794	750	750	430	2220
ADHF135AB	35	4230	1200	2110	1470	1420	690	315	1180	3500	3316	750	950	480	2670

Options

	HydroCube	HydroBac
1. Visual and audible alarm p. 70-71	X	X
2. Cylindrical polyethylene extension p.70	X	

Dimensions are in millimetres, weights in kilograms, volumes in litres.