



Oil separators

with coalescing filter

- Tank in fabricated steel with lifting rings.
- Epoxy bi-component coating.
- Inlet aerator.
- PVC inlet and outlet.

- Vertical automatic stopper in polyethylene calibrated to 0.85.



Hydrocube range:

- Light cover (pedestrian traffic) with locking screw.
- Conical partition.
- Fully removable coalescing filter.
- Available as reinforced model (depending on installation limitations).

HydroBac range:


- Cylindrical manholes without cover.
- Removable coalescing filter.

HydroCube

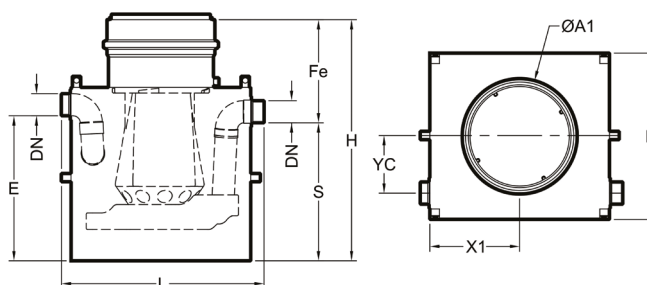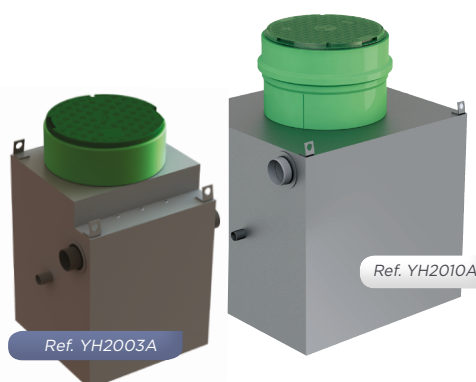

YH20A range	Size l/s	L	P	H	E	S	Fe	DN (PVC Ø)	Weight	Separator Volume	ØA1	X1	YC	"Fixed" extension option	"Adjustable" extension option
YH2003A	3	900	745	1200	660	630	570	110	110	350	585	373	253	PLA13555G PLA13556G	-
YH2010A	10	1470	1200	1740	1050	1000	740	160	247	1560	745	650	410	-	ETR47EF ETR65EF

HydroBac

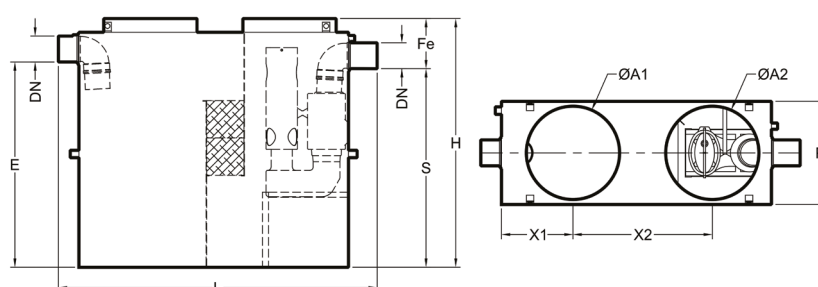

AHFA range	Size l/s	L	P	H	E	S	Fe	DN (PVC Ø)	Weight	Separator Volume	ØA1	ØA2	X1	X2
AHF120A	20	2140	830	1650	1200	1150	500	200	480	1910	750	750	450	1050

Options

1. Visual and audible alarm p. 70-71
2. Cylindrical polyethylene extension p.70

HydroCube	HydroBac
X	X
X	

Dimensions are in millimetres, weights in kilograms, volumes in litres.