





Oil separators

with sludge trap, coalescing filter and lifting compartment

- Tank in fabricated steel with lifting rings.
- Epoxy resin/polyamide adduct-based bi-component coating.
- Inlet aerator.
- PVC inlet and outlet.
- Vertical automatic stopper in polyethylene calibrated to 0.85.
- Conical partition - fully removable coalescing filter.
- Cable tap and vent DN50.
- Built-in lifting tank (optional pump kit).
- 2"1/2 steel threaded coil tank outlet discharge.
- 3-piece tapped/female D75 union bonding connection supplied with the tank.

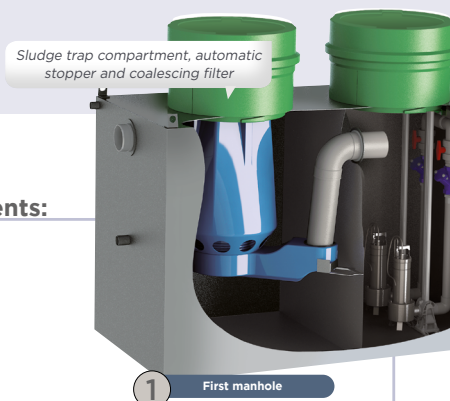

1 First manhole


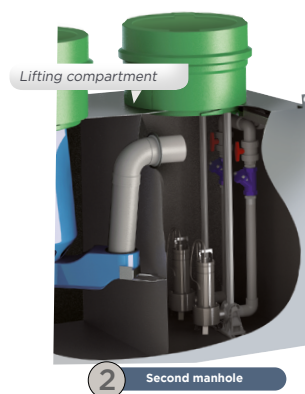


2 Second manhole

The different compartments:



Ref. YHR0506A

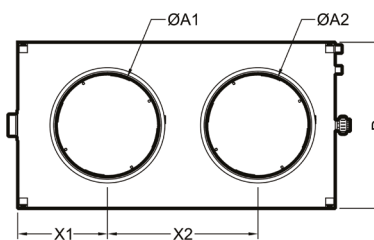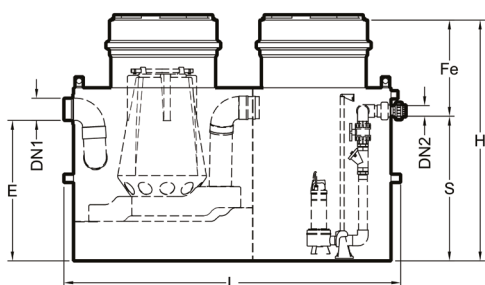

Commissioning:
ref. IN4005

YHRA range	Size l/s	L	P	H	E	S	Fe	DN1 (PVC Ø)	DN2 (Threading)	Weight	Volume			ØA1	ØA2	X1	X2	"Adjustable" extension option
											sludge trap	Separator	Lifting					
YHR0501A	1.5	2160	900	1490	660	800	690	110	2"1/2	275	150	200	622	745	745	370	1100	ETR47EF ETR65EF
YHR0503A	3	2170	995	1490	790	800	690	110	2"1/2	296	300	442	700	745	745	500	980	
YHR0506A	6	2480	1200	1740	1020	1050	690	160	2"1/2	462	600	960	1080	745	745	650	1090	
YHR0508A	8	2480	1200	1990	1270	1300	690	160	2"1/2	628	800	970	1250	745	745	650	1090	
YHR0510A	10	2500	1200	1990	1270	1300	690	160	2"1/2	628	1000	1000	1250	745	745	650	1090	

Options

1. Visual and audible alarm p. 70-71
2. Cylindrical polyethylene extension p.70
3. Kit with 1 or 2 pumps p. 56

Hydrobac
X
X
X

Dimensions are in millimetres, weights in kilograms, volumes in litres.