





Cylindrical separators

with sludge trap and coalescing filter

- Polyester tank made with filament winding.
- Automatic stopper in polyethylene calibrated to 0.85 outlet (other calibration on request)
- Removable coalescing filter.
- Cylindrical manholes without cover.



Extension as option

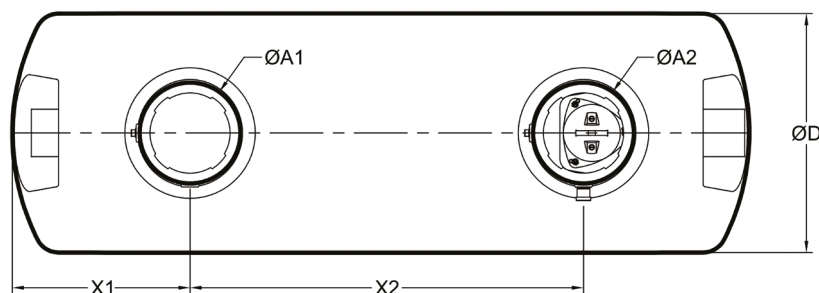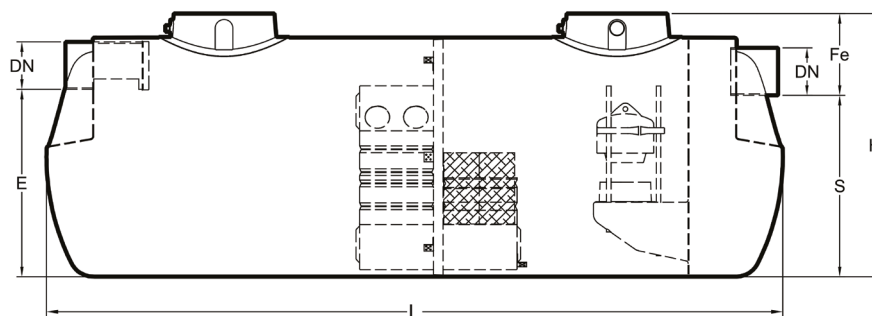

U6

U6 range	Size l/s	L	ØD	H	E	S	Fe	DN (PVC Ø)	Weight	Volume		ØA1	ØA2	X1	X2	"Adjustable" extension option
										sludge trap	Separator					
U6ADA2P	30	3554	1600	1816	1350	1300	516	200	421	3000	2700	790	790	1150	1254	ETR47EF ETR65EF
U6ADF3P	35	4499	1600	1816	1240	1190	626	315	509	3500	3150	790	790	1150	2199	
U6AEA3P	40	5093	1600	1816	1240	1190	626	315	556	4000	3600	790	790	1150	2792	
U6AEF3P	45	5686	1600	1816	1240	1190	626	315	605	4500	4050	790	790	1150	3386	
U6AFA3P	50	6280	1600	1816	1240	1190	626	315	659	5000	4500	790	790	1150	3980	

For larger sizes, please contact our design office.

Options

1. Visual and audible alarm p. 70-71
2. Cylindrical polyethylene extension p.70
3. Anchoring straps p. 72
4. Speed chassis p. 72

U6

X

X

X

X

Dimensions are in millimetres, weights in kilograms, volumes in litres.