




Cylindrical separators

with sludge trap and coalescing filter

- Tank in S235JR fabricated steel with lifting rings and anchoring bracket.
- Epoxy resin-based bi-component coating.
- Cylindrical manholes without covers.
- Automatic stopper in polyethylene calibrated to 0.85 outlet (other calibration on request)
- Removable coalescing filter.

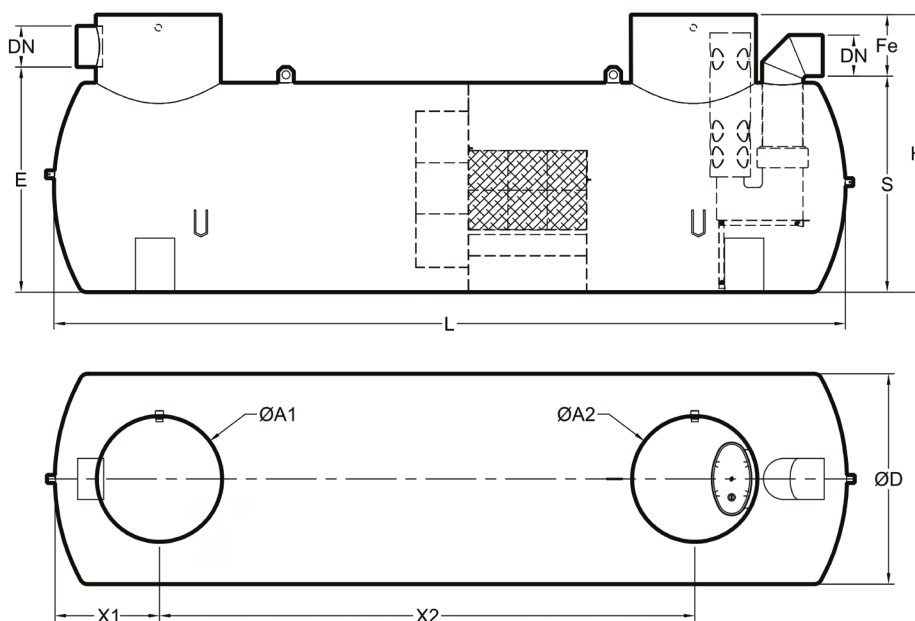

U4 range	Size l/s	L	ØD	H	E	S	Fe	DN (PVC Ø)	Weight	Volume		ØA1	ØA2	X1	X2
										Sludge trap	Separator				
U4ADA2A	30	3547	1600	2000	1703	1653	347	200	726	3000	2700	750	750	698	1902
U4ADF3A	35	4047	1600	2120	1723	1653	467	315	841	3500	3150	750	950	698	2187
U4AEA3A	40	4047	1600	2120	1723	1653	467	315	841	4000	3600	750	950	698	2187
U4AEF3A	45	4547	1600	2120	1723	1653	467	315	900	4500	4050	750	950	698	2687
U4AFA3A	50	5047	1600	2120	1723	1653	467	315	988	5000	4500	750	950	698	3187

For larger sizes, please contact our design office.

Options

1. Visual and audible alarm p. 70-71
2. anchoring tensioners p. 72
3. Speed chassis p. 72

U4

X

X

X

Dimensions are in millimetres, weights in kilograms, volumes in litres.